


Log Steppers

Manufacturers Information | Various

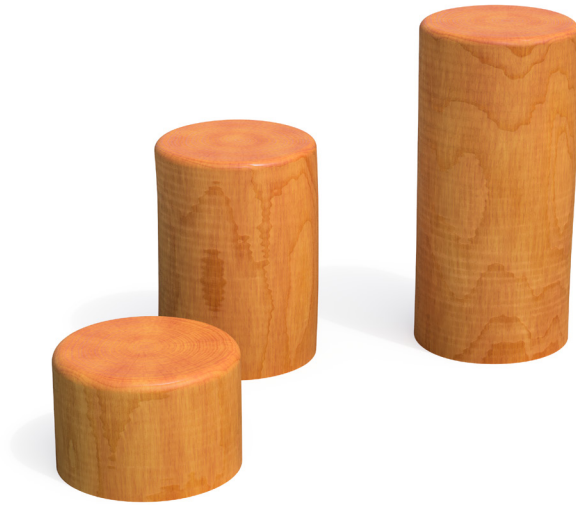

150-200mm Diameter

| | |
|---------------|--------------|
| PN1145 | 200mm Height |
| PN1419 | 400mm Height |
| PN1420 | 600mm Height |

200-250mm Diameter

| | |
|---------------|--------------|
| PN1196 | 200mm Height |
| PN1421 | 400mm Height |
| PN1422 | 600mm Height |

250-300mm Diameter

| | |
|---------------|--------------|
| PN1205 | 200mm Height |
| PN1423 | 400mm Height |
| PN1424 | 600mm Height |

Material Specifications

| | |
|-------------|-----------------|
| Post | Ironbark timber |
|-------------|-----------------|

Equipment Specifications

| | |
|-------------------------------|----------------------------------|
| Free Height of Fall | Not required |
| Fall Zone Size | Not required |
| Activity Space Recomm. | Stepper Diameter + 1000mm |
| Highest Point | varies depending on installation |

Other Required Information

| | |
|----------------------|---|
| Treatments | Oiled Cabots Aquadeck Natural or similar |
| Largest Part | Post |
| Heaviest Part | 0-20kg One Person Lift or 21-40kg Two Person Lift depending on length |

Note: The log steppers are priced per 100mm of length and are supplied debarked, radiused, sanded and oiled. The overall stepper length = footing depth in-ground + softfall surface (if any) + finished height above surface level

Standards

AS 4685 2021 Series

Applications


| | |
|-----------------------------|--|
| Age Group | 2 years + |
| Supervision Level | Young children should be supervised and inappropriate activities discouraged |
| Playspaces | Public parks, schools, early childhood centres commercial play areas |
| Environment | Shade preferred for user comfort and protection. |
| Vandalism Resistance | Low susceptibility |

Please note


Our Natura Play Elements ranges are made as original pieces, not mass-produced. The character of each piece will be affected by the individual timber available at the time of production. The above image should be used as a guide only.

Whilst care is taken to select the best materials, timber is a natural material that is expected to seasonally expand and contract over time and when subjected to temperature extremes. We use Ironbark and Cypress timber in our designs, Cypress timber in particular is prone to fine checking and knots are very common. Accordingly, timbers supplied may have checks and knots that are not structurally compromising.

Product Dimensions

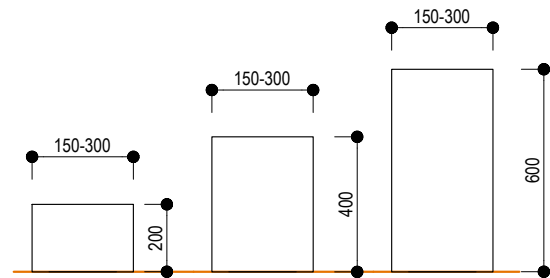

Activity Space

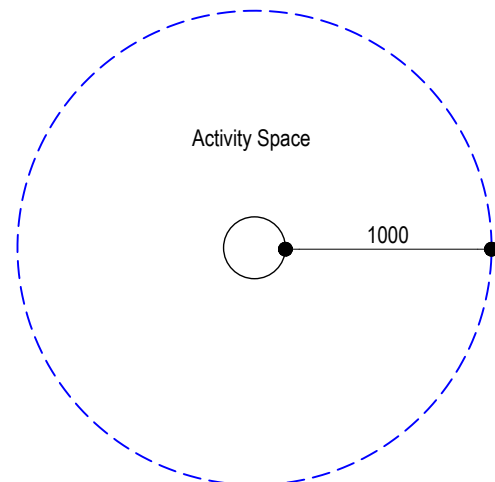

Log Steppers

Manufacturers Information | Various

Installation


Footing quantities and depths

From ground level

| Item | Qty | Diameter | Depth |
|-------|-----|------------|------------|
| Posts | 1 | See detail | See detail |

Note:

This product is designed for 300mm softfall. Check the proposed on site softfall depth. If it is not 300mm, please adjust depths of post holes accordingly, to achieve correct overall subsurface depth. This will maintain correct height of equipment above undersurface level.

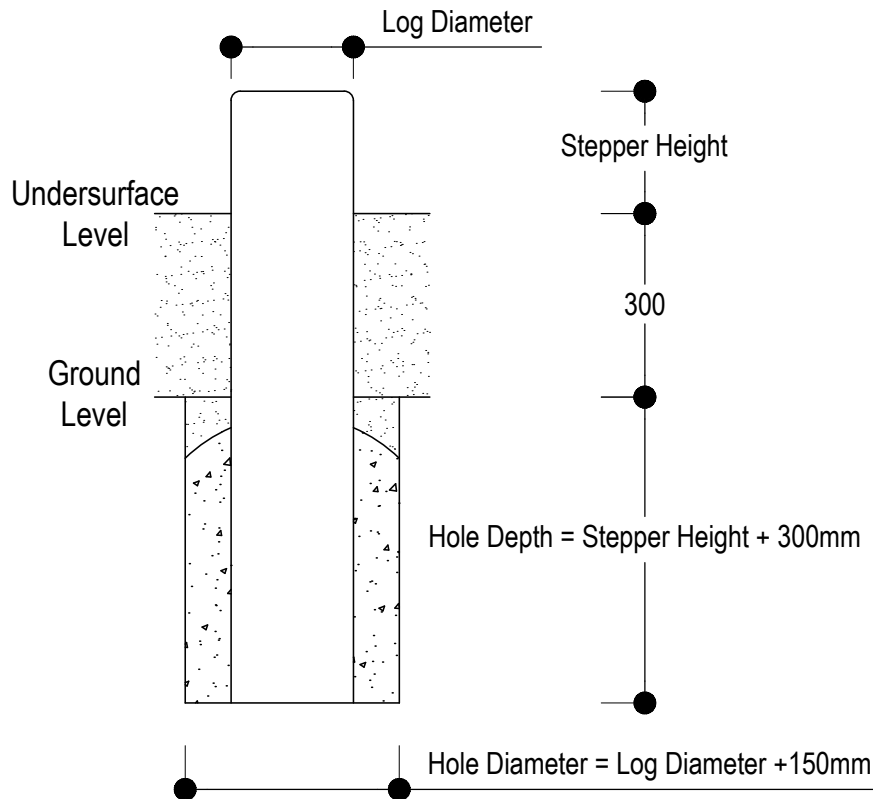

Inspection Notes

All inspections and maintenance to be carried out by competent people with the appropriate knowledge, experience and authority.

Inspection Frequencies

These are a guide only - local risk factors such as heavy usage, nearness to coast, and vandalism patterns need to be taken into account.

Routine Visual Inspection - Daily

Check for breakages, loose fittings and debris. Where safety issues are identified, quarantine until repaired.

Operational Inspection - Quarterly

RVI plus:-
Check security fixings.

Comprehensive Inspection - Annually

OI plus :-
Check for structural rigidity and degradation e.g. corrosion, decay etc. Where possible, remove undersurfacing to examine condition of supports and footings.

Maintenance - Annual

Regular inspection for signs of insect or fungal attack and, where evident, cleaning and treating as appropriate.

Apply 2 coats of water-based decking oil every 6 months

Cracks will open and close with the weather, particularly dry heat or prolonged wet. Where significant (i.e. >5mm) they can usually be caulked with an exterior grade silicon (available in colours to suit). Where splinters form, they can be removed and sanded smooth before re-coating.

In areas of high exposure to sun, wind and rain more frequent treatments may be necessary.

Note: Ensure all replacement parts conform with manufacturers original specifications

Note: In heavy use environment, more frequent inspection regime recommended

Note: Quarantine equipment during installation, inspection & maintenance